CH-703

UHF 3 Channel Hybrid Combiner Series

UHF Hybrid Combiner series covering 380 - 470 MHz by two models.

- Combining three transmitters on one antenna.
- No tuning required. Full bandwidth. For each model.

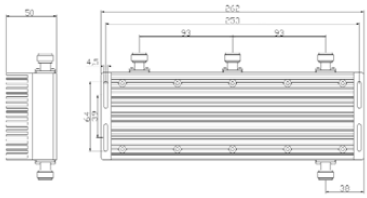

ELECTRICAL SPECIFICATIONS

Type	UHF 3 Channel Hybrid Combiner
Frequency	CH-703/T: 380 - 430 MHz CH-703: 400 - 470 MHz
VSWR	≤ 1.3:1
Impedance	50 Ohm
Max. Input Power	100 W (Per channel)
Insertion Loss	≤ 5.5 dB
Isolation TX - TX	≥ 20 dB

MECHANICAL SPECIFICATIONS

Color	Black
Weight	2.2 kg
Connector	Type N-female
Dimension	304 x 50 x 116 mm (W x H x L)
Serial no.	On product label
Operating Temperature	-20° to +60°C

ORDERING INFORMATION

CH-703/T	380-430 MHz 3 CH Hybrid Combiner
CH-703	400-470 MHz 3 CH Hybrid Combiner

Disclaimer: Here you find all products for a complete antenna system. One-stop supplier with focus on high quality products produced in EU. No matter which type of antenna you are searching for, you will find it here. Every effort has been made to ensure the accuracy of the information in this product sheet. Scan Antenna reserves the right to introduce changes to this information without notice. All rights reserved.